



Model Number: APS-808nm-1000mW-MTM-9.0mm-CC

APS 1000 mW 808 nm Laser Diode Module With Adjustable Aspheric Collimating Lens

Absolute Maximum Ratings at 25 °C

Item	Ratings	Unit
CW Output Power	1000	mW
Laser Diode Reverse Voltage	2	V
Maximum Operating Current	1400	mA
Operating Temperature	-25 to 50	°C
Storage Temperature	-40 to 80	°C

- **Simple Integrated Package**
- **Excellent Diode Heatsinking**
- **Small Footprint**
- **Simple Connection With Two Power Leads**
- **Adjustable Collimating Lens**
- **Lightweight, Rugged**
- **Precision Machined**

**Applications: Pointing, Illumination,
Sensing, Solid-State Laser Pumping**



Advanced Photonics Sciences, LLC. Tel.: 570-553-1120

www.advancedphotonicsciences.com

info@advancedphotonicsciences.com





Model Number: APS-808nm-1000mW-MTM-9.0mm-CC

APS 1000 mW 808 nm Laser Diode Module With Adjustable Aspheric Collimating Lens



Optical and Electrical Characteristics at 25 °C

Parameter	Min	Typical	Max	Units	Test Condition
Threshold Current	-	300	500	mA	-
Operating Current	-	1100	1400	mA	$P_o = 1000$ mW
Operating Voltage	-	1.9	2.2	V	$P_o = 1000$ mW
Fast Axis Beam Divergence	-	54	63	°	$P_o = 1000$ mW 1/e ² Full Angle
Slow Axis Beam Divergence	-	14	20	°	$P_o = 1000$ mW 1/e ² Full Angle
Lasing Wavelength	805	808	811	nm	$P_o = 1000$ mW
Transverse Mode	MTM	MTM	MTM	-	All Currents
Polarization TE	-	-	-	-	Horizontal

Module Experimental Data

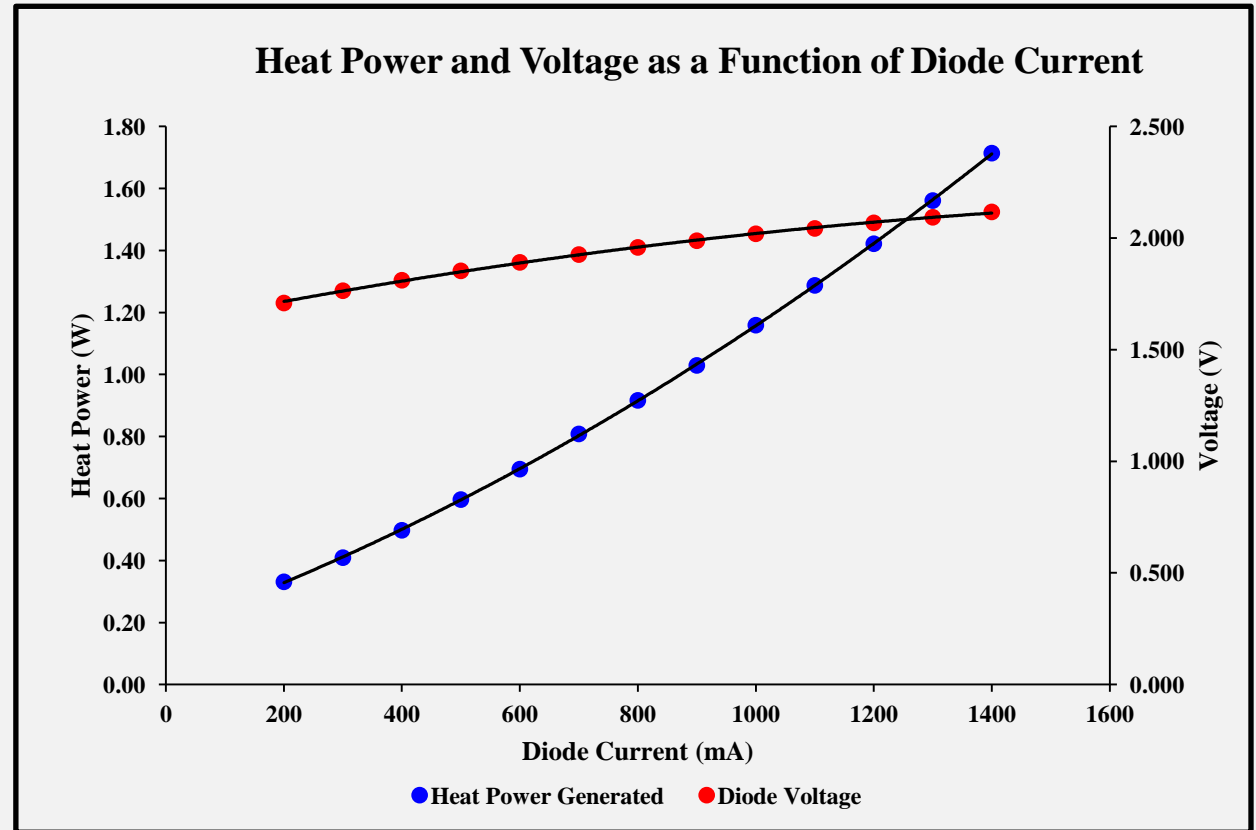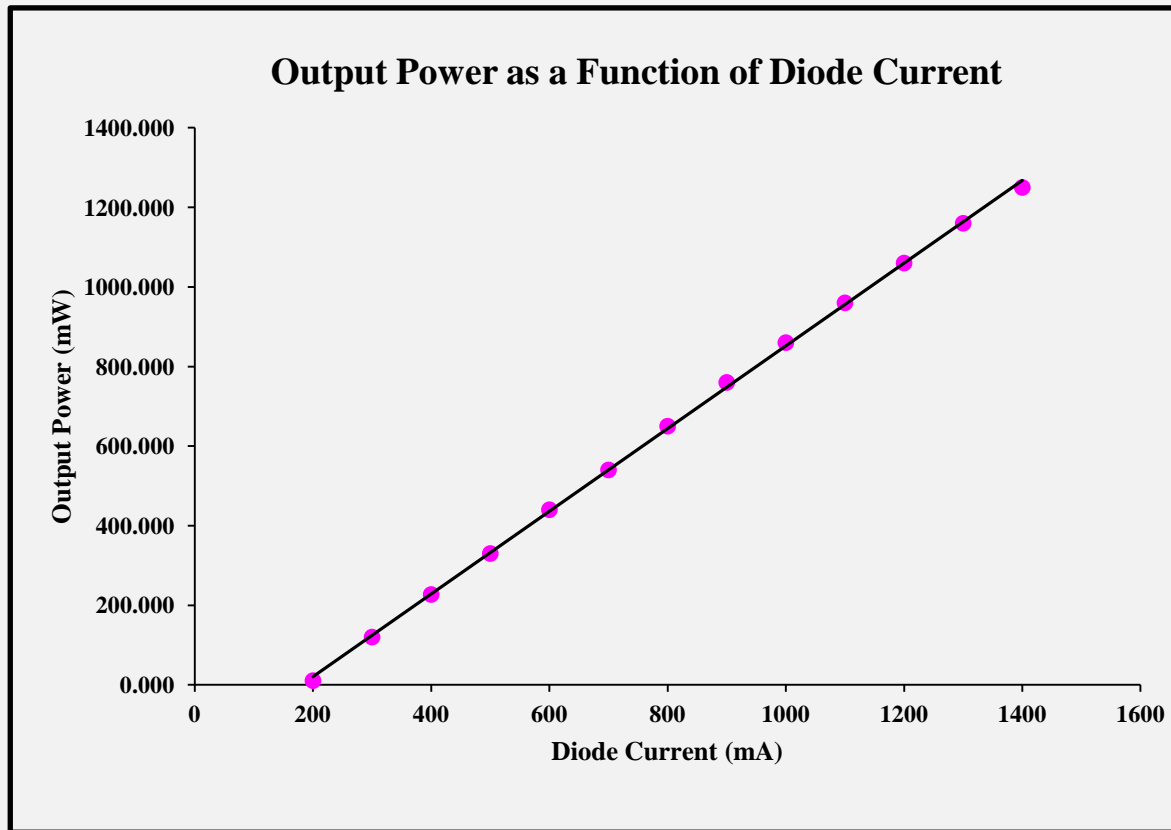


Module Experimental Data

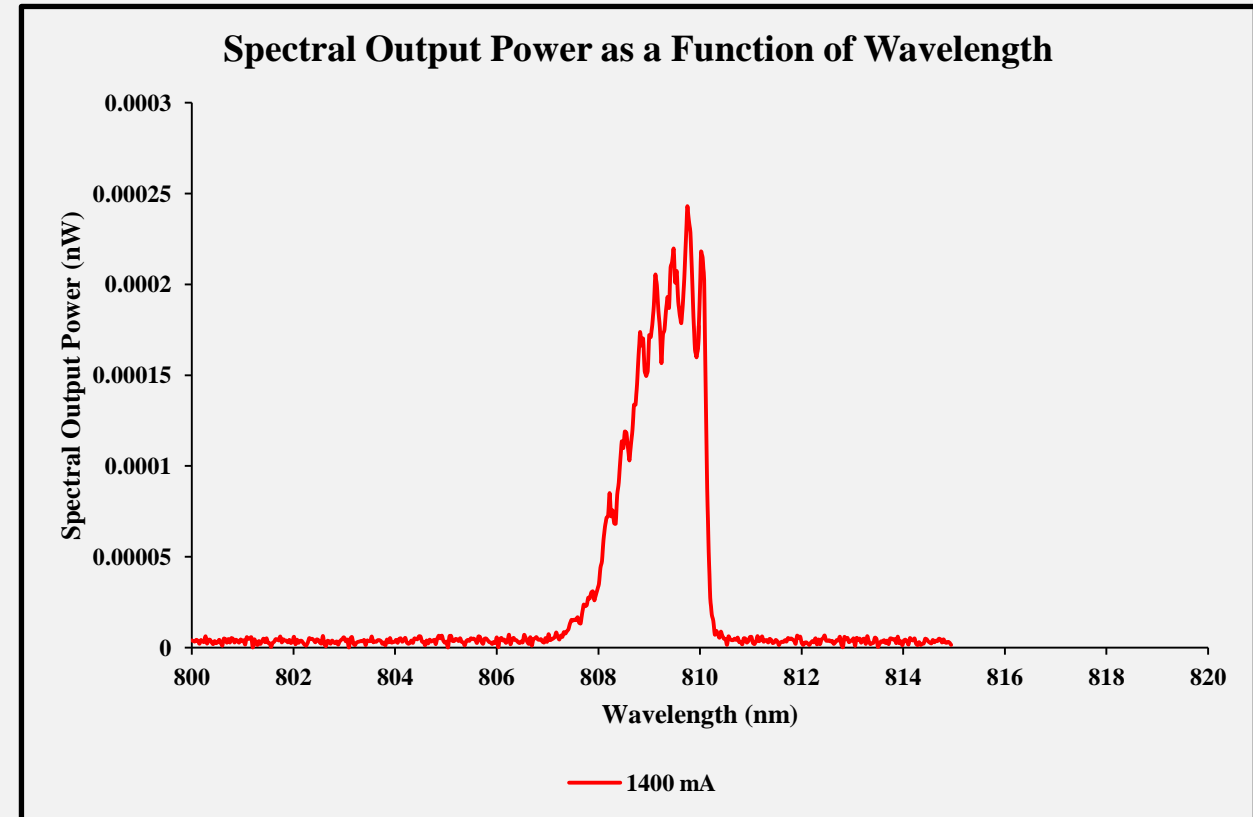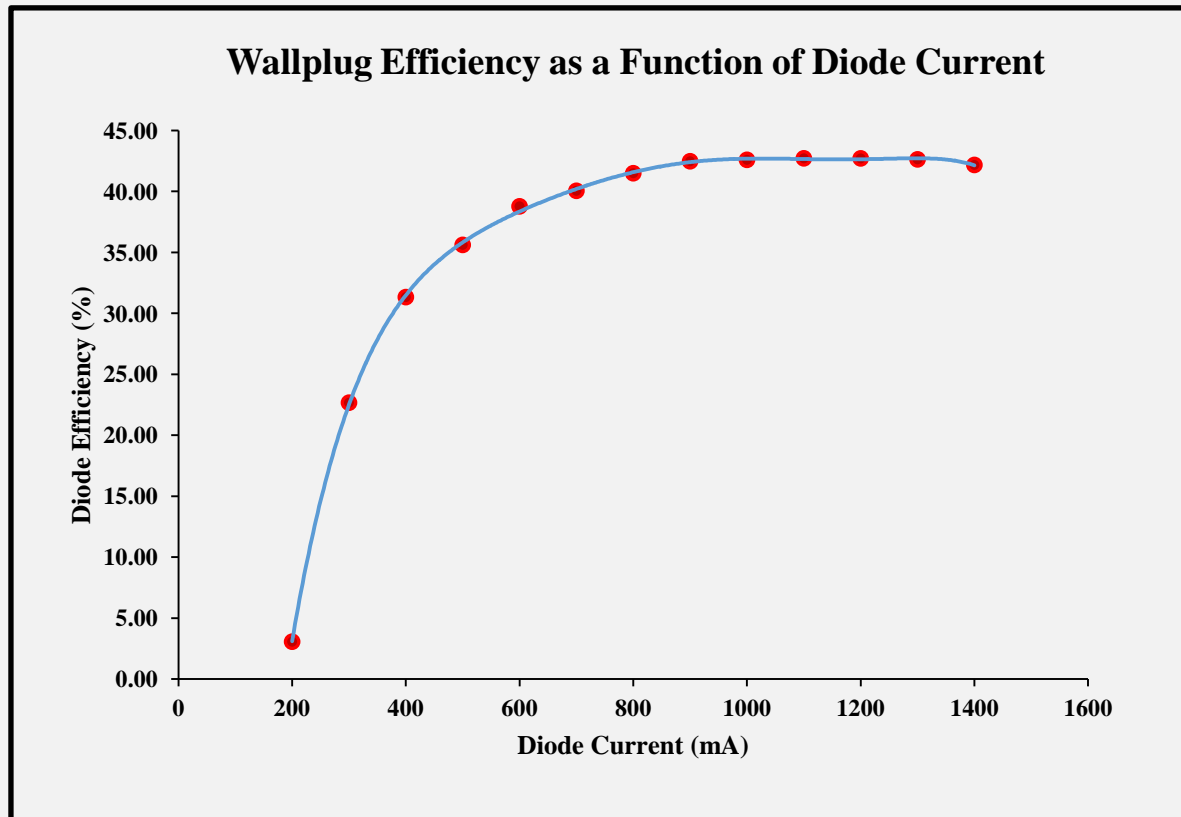

Model Number: APS-808nm-1000mW-MTM-9.0mm-CC

Module Dimensions and Mounting Screws

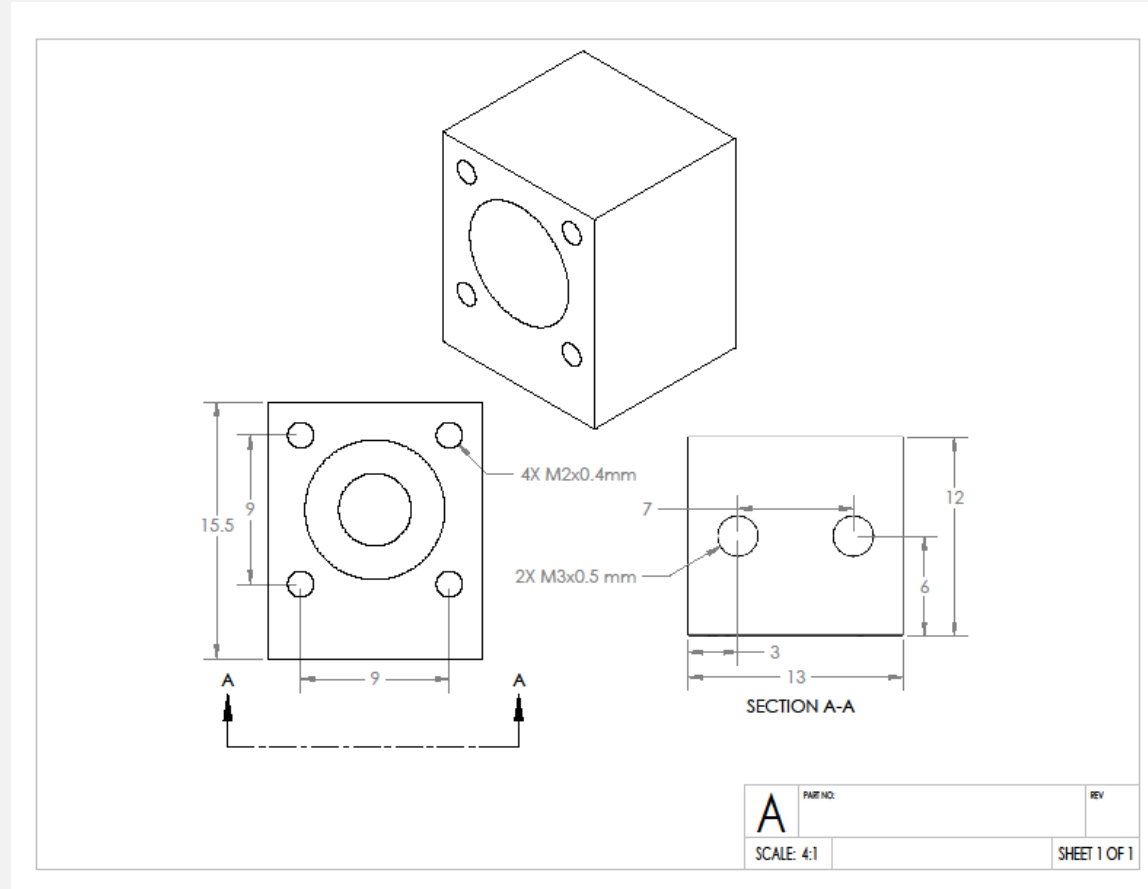



Model Number: APS-808nm-1000mW-MTM-9.0mm-CC

Laser Safety Warnings

- **This OEM Micro-Module is meant for integration into other systems, and as such is not CDRH compliant.**
- **This Micro-Module is a Class 4 laser product.**
- **Always use laser safety glasses with sufficient Neutral Density at the operating wavelength of 808 nm to protect your eyes.**
- **Skin exposure to this laser product should be avoided.**